


ISOTX 125 E2 11 - 360

TECHNICAL DATASHEET

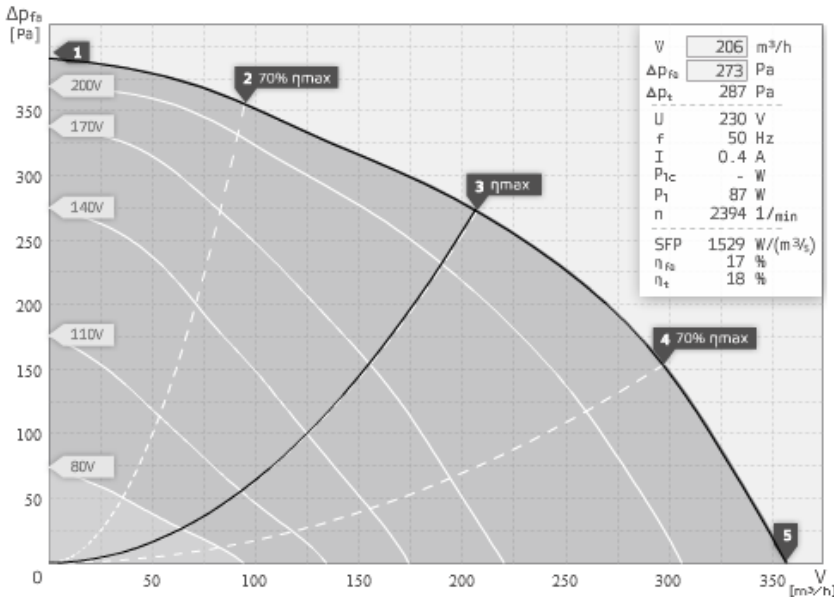

- Forward curved centrifugal fan
- Galvanized metal housing
- Speed controllable
- Integrated thermal switch
- Sound insulated

Operating Point		1	2	3	4	5
Current I	A	0,3	0,3	0,4	0,4	0,5
Power Consumption P1	W	69	74	88	100	108
RPM n	1/min	2734	2647	2395	2050	1763
SPL inlet LWA5	dB(A)	53	53	52	50	52
SPL outlet LWA6	dB(A)	68	68	67	65	65
SPL casing break out LWA2	dB(A)	50	49	49	47	47

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	52	-	47	46	46	44	41	39	34
Outlet	LWA6	67	-	49	53	57	62	62	59	54
Casing	LWA2	49	-	41	43	43	40	40	36	31

ISOTX 125 E2 11 114879	
Voltage UN	230 V 1~
Current Imax	0,5
Ambient Temperature tA	55 °C
Medium Temperature tM	55 °C
Speed Control	V
Motor Protection	TAI
Isolation Class	B
Weight	10,1 kg

